

INSTALLATION INSTRUCTIONS FOR AURORA LIGHTS

PREPARATION


You will need the following items prior to starting the installation process:

- Drill/Driver
- Hole Saw
 - For 3" Diameter assemblies, use a 2.5" hole saw
 - For 4" Diameter assemblies, use a 3.5" hole saw

FASTENING: Keep the following in mind:

- Drill holes at your own risk
- Verify the location for the light to be installed
- Verify that there is enough clearance for the housing of the product to fit into the intended mounting location.
- Maximum recommended material thickness is 1/2".

STEPS

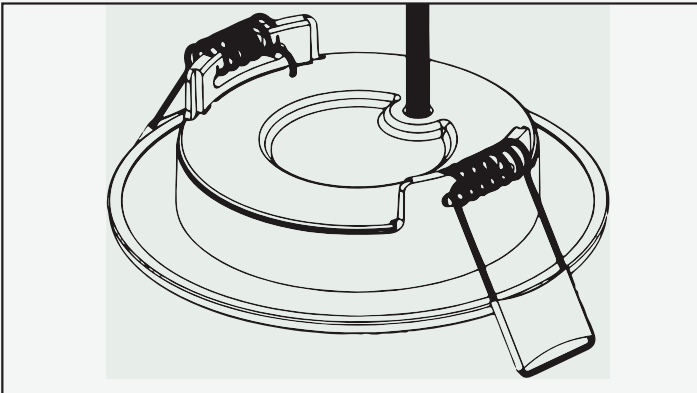

INSTALLATION

1. Mark mounting location and use a hole saw to drill a mounting hole. Make sure to use the correct hole saw for your size light assembly, as shown below:
 - For 3" Diameter assemblies, use a 2.5" mounting hole
 - For 4" Diameter assemblies, use a 3.5" mounting hole
2. Connect wires using a recommended wire splicing method and following the wiring guide on this page.
3. Remove the backer on the adhesive ring, fold back the retaining spring clips, and insert the product into the mounting hole.

DISCONNECT POWER SOURCE (BATTERY) BEFORE STARTING ELECTRICAL WORK.

Recommended methods for splicing wires together (parts not included in Vista product kits):

- Solder and cover bare wires with heat shrink or electrical tape.
- Insulation-displacement connector (IDC) / insulation-piercing contact (IPC).
- Twist on wire connector, "wire nut".
- Crimp connector, "Butt splice".


WIRING:

Route wire as necessary for the application. Do not pinch or puncture wires with fasteners. Do not rout wires around sharp edges. A wire loom should be used for protection if wires are to be routed through areas where they may encounter sharp edges, in an application that would experience high amounts of vibration, in areas that may have fasteners protruding into them during later assembly, or other extreme conditions. Standard wiring outputs can be seen below.

Vista Standard RGB Lighting Wire Colors – Due to product variation, the wire colors for some Vista RGB lights may vary depending on the product. Refer to the following wire polarity information for Vista RGB Lighting.

Vista reserves the right to modify this specification without prior notice.

SINGLE COLOR LIGHTS

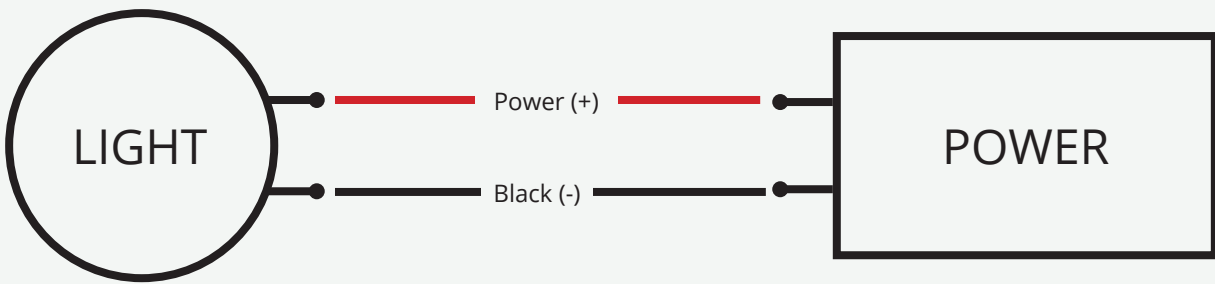

TUNABLE LIGHTS (COMMON GROUND)





TUNABLE LIGHTS (COMMON POWER)



WARNING:

1. Supply current and wattage must not exceed the rated values on the specification documents.
2. Incorrect polarity or improper wiring may cause personal injury and/or damage to the product. It is recommended that an electrical technician, professional, or similarly qualified individual finish wiring.
3. To avoid electrical shock risk, all failures should be examined by a qualified technician.
4. Environmental suitability, including but not limited to water resistance, varies based on product design. Unless explicitly noted, products are to be installed in a location shielded from outdoor elements. To avoid irreparable damage, refer to specification sheets to locate products in a proper environment.
5. Do not install products near an open flame or in high temperature environments unless the product is explicitly designed to function as such. Adversely, do not install products in excessively cold environments unless explicitly designed to function as such. Refer to product spec sheets/drawings for information about minimum and maximum operating temperatures.
6. Vista Manufacturing, Inc. is not liable for any injuries or damage caused due to improper wiring or installation.
7. The listed IP Rating on products applies to the lighted assembly and installed connectors. If a product has an open wire to allow for hardwiring or installing aftermarket connectors, assume the IP rating at the open wire point is no higher than IP20.
8. Do not use cutting tools such as wire cutters, scissors, or shears to separate wire. Wires should be pulled apart in shear, perpendicular to the flat plane of the wire ribbon, and not in tension.



Vista reserves the right to modify this specification without prior notice.