

Draco

- Available in white or black, with or without power button
- Operating voltage 10 to 30 Vdc
- Operating temperature -40° C to 65° C
- UL category code (CCN) IFDR2/IFDR8




Specifications

Part No.	Voltage	Cap	Current (mA/ft)	Wattage (W/ft)	Length (in)	LED Color	CCT/Wave-length	Luminous Flux (lm/ft)
440153	10 - 30 Vdc	Black	250	3.2	8	White	4000 K	160
440154	10 - 30 Vdc	Black	600	8.2	12	White	3725 K	350
440155	10 - 30 Vdc	White	250	3.2	8	White	3725 K	160
440156	10 - 30 Vdc	White	600	8.2	12	White	3725 K	350
440160	10 - 30 Vdc	Black w/switch	250	3.2	8	White	3725 K	160
440161	10 - 30 Vdc	Black w/switch	600	8.2	12	White	3725 K	350
440162	10 - 30 Vdc	White w/switch	250	3.2	8	White	3725 K	160
440163	10 - 30 Vdc	White w/switch	600	8.2	12	White	3725 K	350
*440284	10 - 30 Vdc	Black w/switch	200	2.4	8	Red	630 nm	50

* This option is special-order only and does not have a UL Recognized Mark

Dimensions

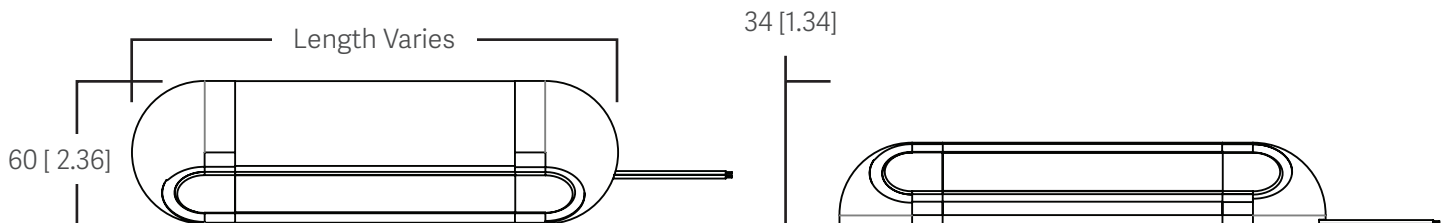

Vista reserves the right to modify this specification without prior notice.