

# RF Inline Controller

## Install Instructions


### For Your Safety:

- Disconnect power source before starting electrical work
- Read all safety notes before installing the product
- Verify that the power supply complies to the voltage limits as shown in the PSG

### Precautions:

- The products should not be stacked.
- Avoid installing the product within 6" of power supply.
- Do not install behind or within a metal object.

### General Diagram

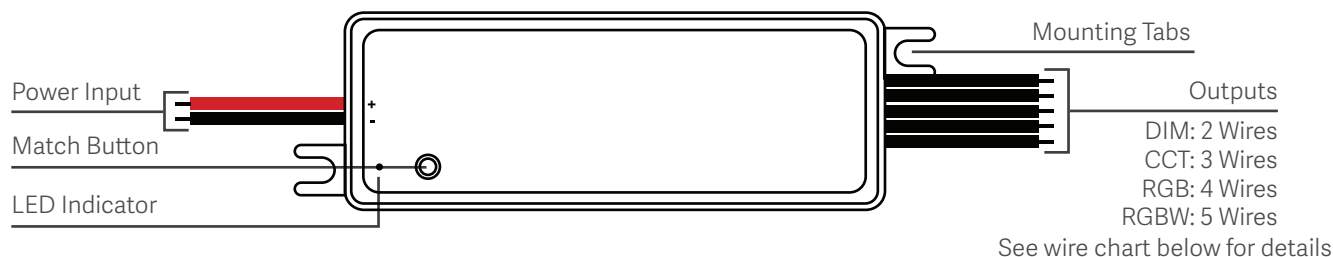

### Match Remote Control

#### Use the Controller's Match Button

##### Match:

- Short press the Match button, immediately press ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) of the Remote. The LED indicator will flash if the match is successful.

##### Delete:

- Press and hold Match button for 5 seconds to delete all matched remotes. The LED indicator will flash if the matched remotes were deleted.

#### Use Power Restart

##### Match:

- Rapidly switch power to the Controller on and off two times.. Immediately short press the ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) 3 times on the remote. The light will blink 3 times if the match is successful.

##### Delete:

- Rapidly switch power to the Controller on and off two times. Immediately short press the ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) 5 times on the remote. The light will blink 5 times if the matched remotes were deleted.

### Fade In and Fade Out Setting

- Long press the Match button for 5 seconds, then short press the match button 3 times. The light ON/OFF fade time will be set to 3 seconds and the indicator light will blink 3 times.
- Long press the Match button for 10 seconds to restore factory default settings. This will set the light ON/OFF fade time to 0.5 seconds.

### Output Wire Chart

Type	DIM		CCT			RGB/RGBW				
Wire Color	R	BI	R	G	W	BI	R	G	B	W
Function	+	-	+	WW-	CW-	+	R-	G-	B-	W-

### RGB/RGBW Dynamic Mode List

1. RGB Jump
2. RGB Smooth
3. 6 Color Jump
4. 6 Color Smooth
5. Yellow Cyan Purple Smooth
6. RGB fade in and Out
7. Red fade in and out
8. Green fade in and out
9. Blue fade in and out
10. White fade in and out

Vista reserves the right to modify this specification without prior notice.

