

DIM RF Controller

Install Instructions

For Your Safety:

- Disconnect power source before starting electrical work
- Read all safety notes before installing the product
- Verify that the power supply complies to the voltage limits as shown in the PSG

General Diagram



Match Remote Control

Use the Controller's Match Button

Match:

- Short press the Match button, immediately press ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) of the Remote. The LED indicator will flash if the match is successful.

Delete:

- Press and hold Match button for 5 seconds to delete all matched remotes. The LED indicator will flash if the matched remotes were deleted.

Use Power Restart

Match:

- Rapidly switch power to the Controller on and off two times. Immediately short press the ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) 3 times on the remote. The light will blink 3 times if the match is successful.

Delete:

- Rapidly switch power to the Controller on and off two times. Immediately short press the ON/OFF button (for single zone remotes) or the Zone button (for multi-zone remotes) 5 times on the remote. The light will blink 5 times if the matched remotes were deleted.

Fade In and Fade Out Setting

- Long press the Match button for 5 seconds, then short press the match button 3 times. The light ON/OFF fade time will be set to 3 seconds and the indicator light will blink 3 times.
- Long press the Match button for 10 seconds to restore factory default settings. This will set the light ON/OFF fade time to 0.5 seconds.

Vista reserves the right to modify this specification without prior notice.




Push Button Control

- The Push Buttons have dimming function by default
 - Short Press: Turn on or off each channel
 - Long press (1-6s): Press and hold to dim lights. Control alternates between brighter and dimmer with every other long press.
 - Dimming Memory: Light returns to the previous dimming level when power is switched on and off again.


Single Color (1-Channel)	
Button	Function
1	Short press ON/OFF, Long press to dim

Wiring Diagram

Wiring for Dual-Color

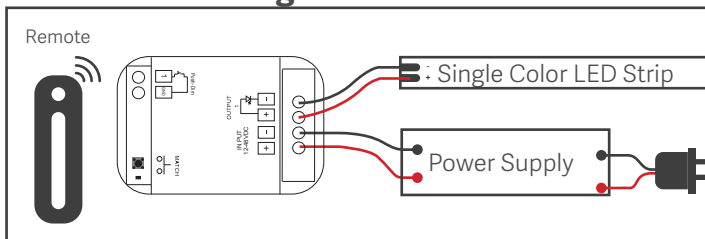

Wiring for Push-Key for Dual-Color

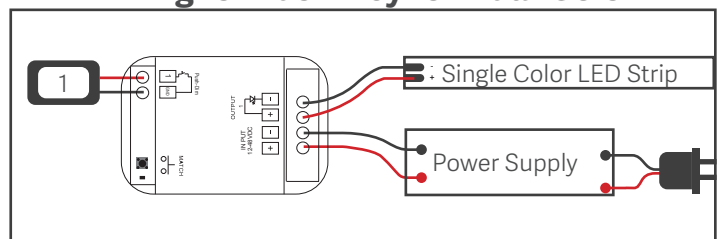

Vista reserves the right to modify this specification without prior notice.