

ARGB 15A Stair Controller


- Multi-pixel RGB LED strip controller with SPI signal output
- Supports Tuya App integration as well as voice control with Amazon Alexa and Google Assistant
- Compatible with 28 different control chips (listed on the product's install instructions)
- Linear and Stair Step light settings for use on handrails and steps
- Integrates Proximity Sensor (PIR) and Push Button Control
- Match with RF 2.4G single zone remote control
- Dynamic pre-programmed lighting effects, including 5 default animation patterns and 10 customizable color modes
- 5-24 Vdc Input Voltage with matching Output Voltage to lights
- 15A maximum current per Channel



Specifications

Part No.	Input Voltage	Output Channels	Pixels/CH	Control Signal	RF Control Distance	Operating Temperature	IP Rating
480690	5-24 Vdc	2 CH	960	Wifi, RF, & Push Button	30m	-30 C ~ +55 C	20

Dimensions - 480690

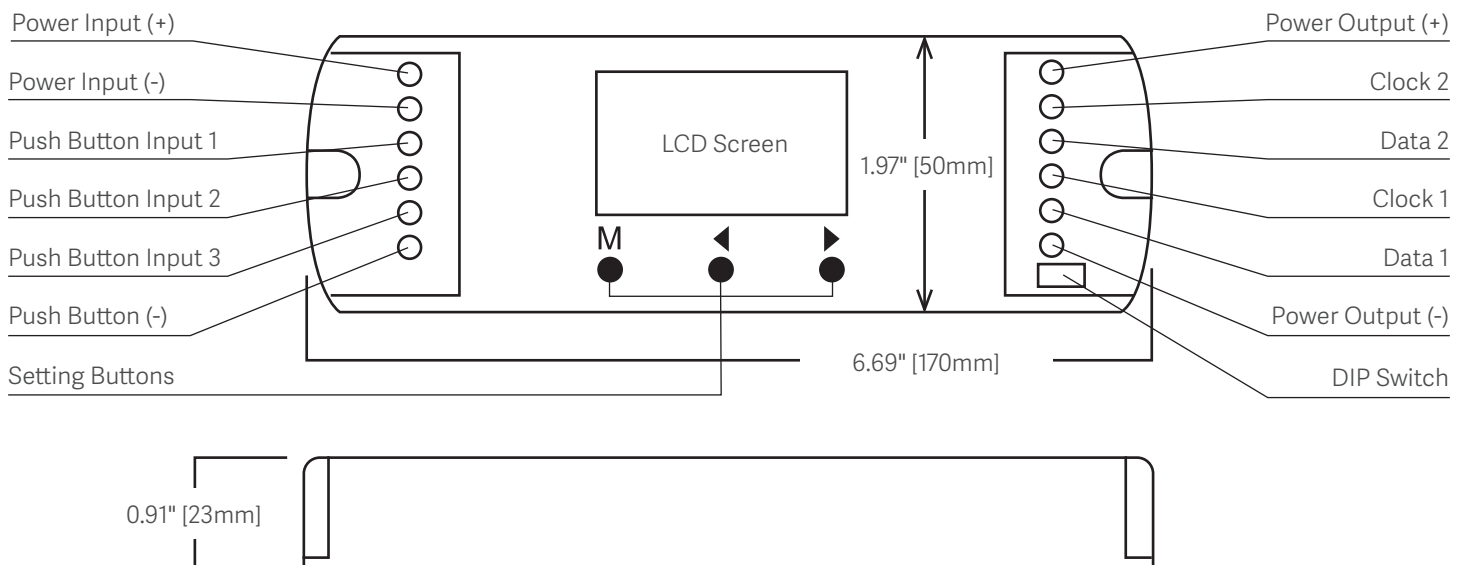

Vista reserves the right to modify this specification without prior notice.

